

# *AP Dynamometer*

The world leader in dynamometers  
since 1937



**DILLON**

Force Measurement Equipment

# ***Dillon Dynamometer — Nobody does it better!***

Originally designed to measure the tension on telephone wires, the Dynamometer has proven to have limitless versatility as a tension and weight measuring instrument. It is used for such diverse jobs as suspended weighing; mounting cables for bridges; adjusting tension on guy wires; field testing chain, rope, wire—anything requiring precision force or tension measurement.



## ***Certificate of Calibration***

An official Certificate of Calibration traceable to NIST, dated and signed, accompanies each new or factory serviced Dillon Model AP dynamometer. Experienced technicians calibrate each instrument on an individual basis making certain that all parts are carefully adjusted and that every unit is within stated accuracy tolerances before it leaves the factory.

## ***Popular Applications***




*Utility Lines*



*Towers*

*Material Handling*

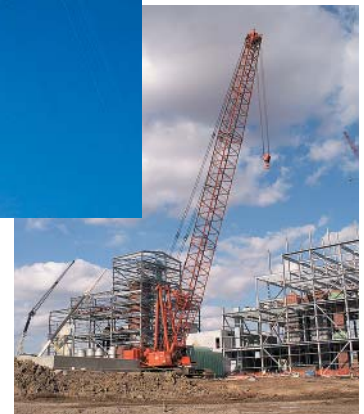

Dillon is the leader in dynamometers with the largest installed population throughout the world. The sturdy design, top grade components and premium coatings make it last for years in severe environments and applications: the pounding aboard military vehicles, rough handling in field measurements and even use underwater! Embraced by industrial contractors across the globe, we are confident the AP will satisfy your most demanding applications.

## ***Worldwide distribution network***

Dillon supports its customers with a worldwide distribution network. In addition to the US and Canada, we serve fifty-seven other countries. Every Dillon distributor offers complete service capabilities from application assistance to sales and product support. Their experienced representatives are knowledgeable experts in the force measurement field and can satisfy virtually any need.

# Feature for feature — Dillon Dynamometer sets the standard.

Accuracy:  $\pm 0.5\%$  of full scale capacity for precise data.

Broadest range of capacities and resolutions are certain to fit your needs.

Wide temperature range for use in nearly any environment (-50 to 140°F / -45 to 60°C)

Large safety factor for overload protection and long life.

No batteries required.

Dial size choice for the best in portability or visibility.

Anti-parallax dial and pointer produce accurate readings from any perspective.

Maximum hand retains peak load point and is easily reset.

Zero control cancels preset loads (backside).

High strength case resists heavy blows.

Generous shackle openings mate with most hooks and hardware.

High specification materials on all load components. Heat treated to tight tolerances.

Durable powder coat paint provides outstanding protection.

Offset load beam eases tension measurement.

Approvals: CE on all capacities excluding 50K.



5" (125 mm) diameter AP dynamometer includes a rugged ABS plastic carry case with die-cut foam inserts. Capacities of 30,000 lb (15,000 kg) and above are shipped in a heavy-duty reinforced plywood crate. An optional steel carry case is available for 10" (250 mm) diameter dynamometers up to 20,000 lb (10,000 kg) capacity.

<sup>1</sup> Dillon recommends short intervals in clean water followed with rinse and drain.

## Options



### Zero positioning

The standard zero position is 9 o'clock for both the 5" and 10" dial sizes. Capacities up to 20,000 lb can be supplied with the zero at 12, 3 or 6. Photo shows a nonstandard position of 12 o'clock.



### Klaxon signal alarm

Mounted on rear of the Dynamometer and sounds an alarm at a preset load point.



Dillon also manufactures electronic dynamometers and quick-attach tension meters.

## Model AP Mechanical Dynamometer Capacities and Increments

### POUND CAPACITIES

5" (125 mm) Dial Size		10" (250 mm) Dial Size	
Part Number	Capacity x Division Size	Part Number	Capacity x Division Size
30006-0019	500 x 5	NA	
30006-0027	1,000 x 10	30007-0026	1,000 x 5
30006-0035	2,000 x 20	30007-0034	2,000 x 10
30006-0043	4,000 x 25	NA	
30006-0050	5,000 x 50	30007-0059	5,000 x 20
30006-0076	8,000 x 50	NA	
30006-0084	10,000 x 100	30007-0083	10,000 x 50
30006-0092	15,000 x 100	NA	
30006-0100	20,000 x 200	30007-0109	20,000 x 100
NA		30784-0017	30,000 x 200
NA		30784-0033	50,000 x 200*

\* Not CE approved.

### KILOGRAM CAPACITIES

125 mm (5") Dial Size		250 mm (10") Dial Size	
Part Number	Capacity x Division Size	Part Number	Capacity x Division Size
30006-0134	500 x 5	NA	
30006-0159	1,000 x 10	30007-0158	1,000 x 5
30006-0126	2,000 x 20	30007-0125	2,000 x 10
30006-0167	4,000 x 25	NA	
NA		30007-0174	5,000 x 20
30006-0118	10,000 x 100	30007-0117	10,000 x 50
NA		30784-0058	20,000 x 100

For dimensional information and other specifications, see the Model AP Dynamometer specifications sheet available from an authorized Dillon distributor, the website at [www.dillonforce.com](http://www.dillonforce.com) or call the factory.

### AUTHORIZED DISTRIBUTORS

**Ask the experts.** Dillon distributors offer complete service capabilities from application assistance to sales and product support. Their experienced representatives are the most knowledgeable experts that you will find in the force measurement industry. We recommend that you consult these capable specialists for all of your measuring needs.

#### DILLON USA

1000 Armstrong Drive  
Fairmont, MN 56031

**Toll-Free:** (800) 368-2031

**Phone:** (507) 238-8796

**Fax:** (507) 238-8258

[www.dillonforce.com](http://www.dillonforce.com)



Dillon is part of Avery Weigh-Tronix. Avery Weigh-Tronix is a trademark of the Illinois Tool Works group of companies whose ultimate parent company is Illinois Tool Works Inc ("Illinois Tool Works"). Copyright © 2016 Illinois Tool Works. All rights reserved. This publication is issued to provide outline information only and may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print, however Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.

#### DILLON UK

Foundry Lane, Smethwick,  
West Midlands B66 2LP

**Phone:** +44 (0) 845 246 6717

**Fax:** +44 (0) 845 246 6718

**Email:** [sales@dillon-force.co.uk](mailto:sales@dillon-force.co.uk)

[www.dillon-force.co.uk](http://www.dillon-force.co.uk)

# DILLON

Force Measurement Equipment

A division of Avery Weigh-Tronix, LLC