

Fully washdown stainless steel Diamond Bench Bases designed for use within the food industry.

Technical Specification



DESCRIPTION

Certified by NSF to NSF/ANSI Standard 3-A, the diamond BS bases are ideal for high capacity bench and floor applications in food environments.

The rugged diamond base design offers an easy to clean, IP69K, spider design which helps to transfer shock loads


and overloads away from the load cell, offering up to 150% overload protection.

Available in a range of sizes, capacities and base finishes from carbon steel for general use, to fully stainless steel NSF certified for food or outdoor applications.

SPECIFICATIONS

PHYSICAL

Operating Application	Designed to operate in a wide range of applications from general use to meat, fish, poultry and dairy processing and dry food applications.
Load Cell	Fitted with IP69K fully stainless steel NTEP approved load cell. Supplied with a 6 wire 10 ft (3 meter) load cell cable.
Base Construction	Carbon steel bases – Carbon steel construction with a high grade powder paint finish understructure and shroud. Stainless steel bases – Easy to clean design. Certified by NSF to NSF/ANSI Standard 3-A. Full stainless steel design, constructed from a food-grade 304 fine brush base with a pickle and electro polish weigh pan ideal for food contact areas.
Operating Temperature	Compliance with legal for trade requirements -4° F to 140° F / -20° C to 60° C (industrial) 10 to 90% humidity
Excitation	Up to 15 VDC (Generated by the weight display)
Load Cell Output	1 mV/V
Feet Adjustment	Captive thread food grade feet with up to ¼" (6mm) foot adjustment on stainless steel version.
Overload Protection	150%
Corner Loading	100%
IP Protection	IP69K
Approved Accuracy	5000d NTEP approval

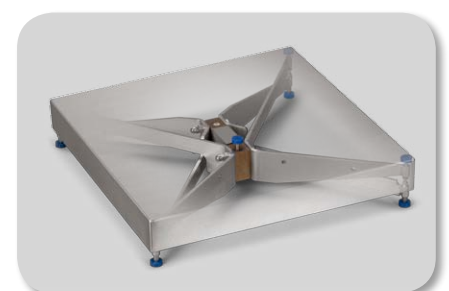

Base construction


BASE CAPACITY/RESOLUTION

	Base size	Resolution
Carbon steel	18" x 18" (460mm x 460mm)	50 lb x 0.01 lb (25 x 0.005 kg)
	20" x 20" (510mm x 510mm)	100 lb x 0.02 lb (50 x 0.01 kg)
		200 lb x 0.05 lb (100 x 0.2 kg)
	18" x 24" (460mm x 610mm)	100 lb x 0.02 lb (50 x 0.01 kg)
	24" x 24" (610mm x 610mm)	100 lb x 0.02 lb (50 x 0.01 kg)
		200 lb x 0.05 lb (100 x 0.2 kg)
	500 lb x 0.1 lb (250 x 0.05 kg)	
Stainless steel (IP69K)	14" x 14" (360mm x 360mm)	30 lb x 0.01 lb (15 x 0.002 kg)
	18" x 18" (460mm x 460mm)	50 lb x 0.01 lb (25 x 0.005 kg)
	20" x 20" (510mm x 510mm)	100 lb x 0.02 lb (50 x 0.01 kg)
		200 lb x 0.05 lb (100 x 0.2 kg)
	18" x 24" (460mm x 610mm)	200 lb x 0.05 lb (100 x 0.2 kg)
	24" x 24" (610mm x 610mm)	100 lb x 0.02 lb (50 x 0.01 kg)
	200 lb x 0.05 lb (100 x 0.2 kg)	
	500 lb x 0.1 lb (250 x 0.05 kg)	

DIMENSIONS (inches)

Base Size	a1	a2	b	c
14" x 14"	4"	5"	14"	14"
18" x 18"	4"	5"	18"	18"
20" x 20"	4"	5"	20"	20"
18" x 24"	4"	5"	18"	24"
24" x 24"	4"	5"	24"	24"

a1 = Carbon Steel a2 = Stainless Steel

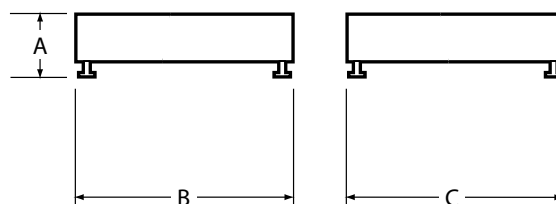

DIMENSIONS (mm)

Base Size	a1	a2	b	c
14" x 14"	100	125	360	360
18" x 18"	100	125	460	460
20" x 20"	100	125	510	510
18" x 24"	100	125	460	610
24" x 24"	100	125	610	610

a1 = Carbon Steel a2 = Stainless Steel

OPTIONS

- Options**
- Ball-top shroud – keep product moving. Reduce operator lifting and bending. (Not NSF approved)
 - Portable cart – makes scale portable, ideal when taking scale to the cleaning room. Constructed in stainless steel, with adjustable height.

APPROVALS

- Agencies**
- NTEP (US) Class 111/IIIL 5,000 d CC#88-104
 - AM (Measurement Canada) WA-3094
 - Certified by NSF to NSF/ANSI Standard 3-A 14159-1-2010
 - IP69K approved



Portable cart option



Avery Weigh-Tronix – UK
 Foundry Lane, Smethwick,
 West Midlands B66 2LP UK
 info@awtxglobal.com
 Phone: +44 (0) 8453 66 77 88
 Fax: +44 (0) 121 224 8183

GSE Scale Systems
 A member of Avery Weigh-Tronix
 Joseph-von-Fraunhofer-Str.3C
 52477 Alsdorf, Germany
 info@gse-europe.de
 Phone: +49 (0) 2404 91869-0
 Fax: +49 (0) 2404 91869-20

Avery Weigh-Tronix

Please call us or visit www.gse-europe.de

